



Kanga Zoom Owners Manual

The Kanga Company, Inc.
Customer Service Center
6200 Seaview Ave. NW
Seattle, WA 98107
1 (800) 347-9793 Fax (206) 782-0651
www.Kangaco.com

PLEASE READ BEFORE USING YOUR NEW KANGA ZOOM ROOFPOUCH

Congratulations! You have just purchased the finest flexible car-top luggage carrier made. With proper care and use, your Kanga RoofPouch should provide years of convenient, attractive and functional travel storage space. This RoofPouch is designed for use with or without standard-size permanent or removable car-top roof racks. It can be used on many, though not all, vehicles without a roof rack.

Your Kanga RoofPouch comes with the four straps with side squeeze buckles and extender straps needed to attach to most vehicles. Please be sure to read this manual thoroughly to ensure proper attachment. If you have any questions or concerns regarding correct attachment, please call us on our toll free number. 800-347-9793

LOADING

1. Unfold your pouch in a clean area and completely unzip.
2. Ensure the roof of your vehicle is free of debris.
3. Center the empty, unzipped Pouch onto a clean roof-top with the no-zipper side facing forward and the logo facing up.
4. Open the top lid and lay it over your windshield.
5. Begin loading the pouch from the front to the back. Try to distribute the load as evenly as possible. Use soft items such as pillows and coats to fill gaps in the pouch.
6. Once the pouch is loaded, zipper the top closed and begin strapping it down.

Note:

Packing the pouch full will help eliminate wind flap. If the bag is allowed to flap it will lead to deterioration of the material. The fuller the pouch is, the less wind flap there will be.

© Copyright Seattle Sports Co., 2005

SECURING

For vehicles with a roof rack:

Unbuckle the 4 - 2" straps and weave the end through the roof rack. Extend the buckle and strap back up to the mating buckle and click it in place. Once the pouch is buckled in place, pull the loose side of the webbing and cinch it tightly down. See fig 1 and 2.

For Vehicles With No Roof Rack

Unbuckle the 4 - 2" Straps and extend the ends into the interior of the vehicle with the doors open. The straps have mating, male and female ends, and should meet in the middle of the vehicle cabin. Buckle the mating ends together and cinch the strap tightly. Then close the doors on the webbing. See fig. 3

For Larger Vehicles With No Rack

We supply 2 - 4' extender straps for vehicles that are wider than normal. Snap the pouch buckles into the extender straps, thus extending the reach by 4 feet. Then proceed to cinch down as described above.

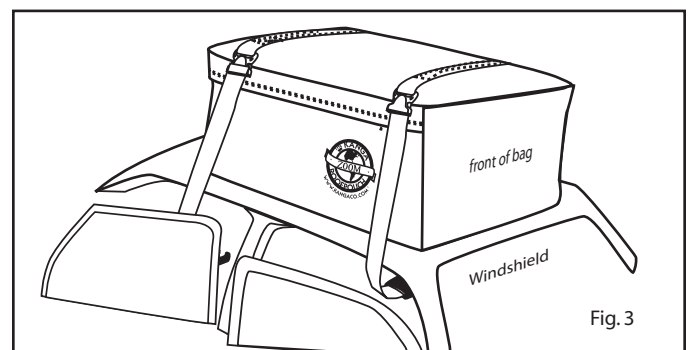

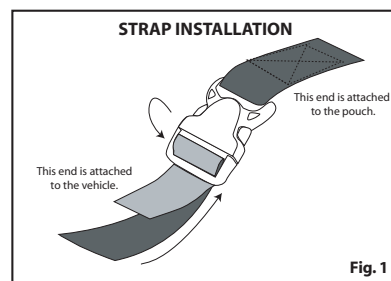


Fig. 3

HELPFUL HINTS:

After each use: Thoroughly hang-dry your RoofPouch and ensure that it is completely dry before storage. Shake off any dirt and debris.

Elevator step: Some vehicles are too tall to easily pack your RoofPouch. For these vehicles we offer the Elevator Step. This collapsible, adjustable step easily hooks over the wheel of your vehicle providing the height needed to efficiently load your RoofPouch. See more detail at www.SeattleSportsco.com

Cleaning the Roofpouch: Use a sponge or clean rag with mildly soapy water, then wipe off with a clean, dry or mildly damp cloth. DO NOT USE solvents, petroleum-based or other harsh cleaning agents, wire brushes or sharp tools to clean your RoofPouch.

Lighting: Loading your RoofPouch in the dark can be difficult and dangerous. For this situation we offer a full line of compact, lightweight clip lights to help you load your RoofPouch safely and efficiently. See www.SeattleSportsco.com for more detail.

Roof Care: Never put anything between your vehicle and the RoofPouch except a non-slip pad. Also check the specification of your vehicles roof load limit and do not exceed it.

Overloading: Do not put so much inside that it is too difficult to close the zipper. This will split the zipper.

Sharp Objects: Make sure any sharps are protected from puncturing the bag.

Straps are not handles: Never pull a loaded pouch off the roof or try to put a loaded pouch on the roof.

Clearance: Be careful entering your garage or low clearance area when the roofPouch is on your vehicle.

WEATHER RESISTANCE: YOUR ROOFPOUCH IS MADE OF WATERPROOF FABRIC, WHICH REDUCES MOISTURE PENETRATION. ALTHOUGH WE USE THIS FABRIC AND THE ROOFPOUCH HAS RAIN FLAPS OVER THE ZIPPER, ROOFPOUCHES ARE NOT 100% WATERPROOF AND WE DON'T CLAIM THEM TO BE.

Warning:

AN IMPROPERLY SECURED ROOFPOUCH CAN FLY OFF OF THE VEHICLE, POTENTIALLY CAUSING DAMAGE TO YOUR GOODS AND/OR INJURY TO OTHERS. PLEASE BE SURE TO THOROUGHLY INSPECT FOR PROPER FIT AND ATTACHMENT PRIOR TO EACH USE.

If at any time you hear flapping, pull off the road as soon as it is safe and check the straps. Excessive flapping WILL damage the RoofPouch. Always ensure that the straps securing the RoofPouch are tight.

LIMITED WARRANTY

The Kanga Company proudly warrants all new Kanga Roof Pouches to be free from any defects in materials and workmanship, when used under normal conditions by the original purchaser, for a period of one year from the date of purchase. Any unit found to be defective during the warranty period will be repaired or replaced, at the sole option of the Kanga Company, Inc.

Since the Kanga Company has no control over the attachment of its products to any vehicle, the Kanga Company disclaims any and all liability for damage or injury which might occur as a result of the improper use or installation of the Kanga RoofPouch. Normal wear and tear of merchandise or damage resulting from misuse, accidents or alterations are not covered by this warranty. DAMAGE OF ANY KIND RESULTING FROM MOISTURE PENETRATION IS SPECIFICALLY EXCLUDED FROM THIS WARRANTY.

To submit any product for warranty consideration, please return the RoofPouch with the original dated sales receipt showing the retail price paid for the product, plus \$10.00 for handling and shipping to the address below.



The Kanga Company, Inc.
Customer Service Center
6200 Seaview Ave. NW
Seattle, WA 98107
1 (800) 347-9793 Fax (206) 782-0651
www.Kangaco.com